





NO:612 Silicon Neon LED Datasheet

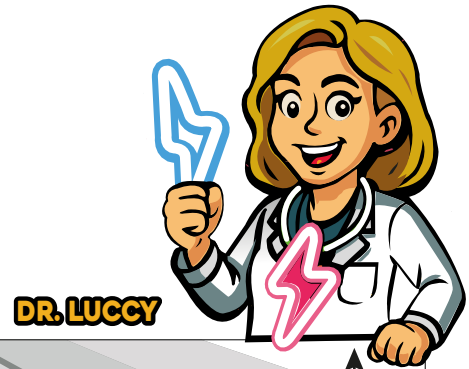

DR. LUCCY

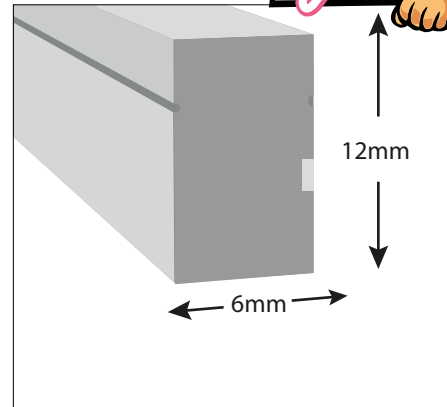

Neon LED Technical Drawing

Technical Details

■ Power	7.5 - 8W
■ Voltage	12 VDC or 24 VDC
■ CRI	80 or 90
■ Led Qty	180 Led / Mt
■ Length/Reel	10 Mt
■ Working Temperature	-25~60°C
■ Storage Temperature	-30~80°C
■ Addressable DMx512-SPI Animated	


Features

- IP67
- %100 Silicone
- High Efficiency LED's with long life-span up to 50.000h
- Ultra-Flexible, unbreakable light body
- Easy to be cut, bent and shaped to various shapes.
- Eco-friendly with low power consumption
- Various colors available
- High efficiency lighting with low heat generation and enhanced safety.
- Durable, low maintenance cost.
- "Can stretch due to heat and cold."
It can expand and contract with temperature changes."
- "You can bend it at an angle opposite to the direction of the light.
It can be bent both in the direction of the light and against it, with a maximum bending diameter of 30mm."
- Made from 100% pure silicone, it offers superior flame resistance and long-lasting clarity without the yellowing typical of standard plastics.




Sample Product Images

NO: 612 Black/White

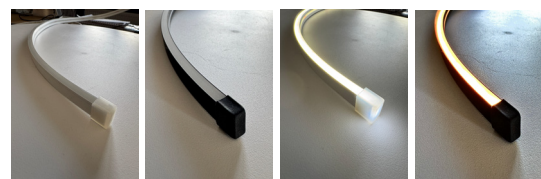

Light off

Light on



10 MT



WATERPROOF



FIREPROOF



SILICONE





WARRANTY

Color Temperature

	2700K
	3000K
	4000K
	5000K
	6500K
	10000K


Light Distribution

LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM



120°


Dimension

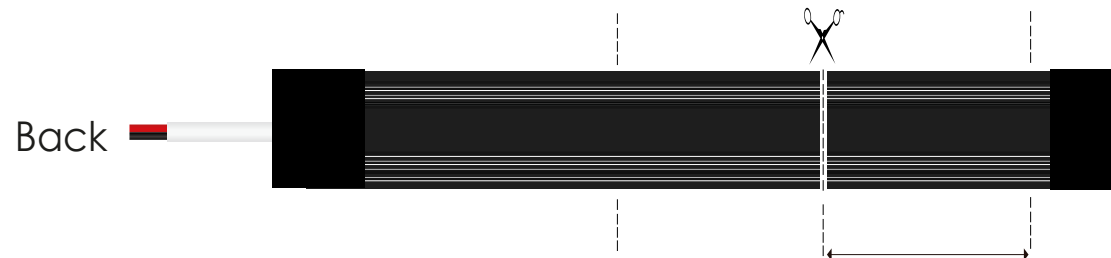

25mm Cutting on 12V DC Product
50mm Cutting on 24V DC Product

Cuttable Neon LED

Easy Cutability
25mm Cutting on 12V DC Product
50mm Cutting on 24V DC Product




Waterproof Neon LED

IP 67 Waterproof







Bendable Neon LED

Extremely flexible design easily bendable
and shapeable without cracking.
Can Be Bent Up To A
Maximum Diameter Of 30mm




Accessories Specification


Name	Quantity
End cap	4pc
End cap with hole	2pc
Clips	10pc
Screw	10pc







Section diagram



Install




Installation part dimension



Packing


(P)Package/MT	QTY / CTN	G.W / CTN(KG)	CTN Size(mm)
1x10mt	5x10mt	18	320x320mm




MINIMUM NEON LED BENDING DIAMETER

Yellow Area


Light emitting surface






Light Profile

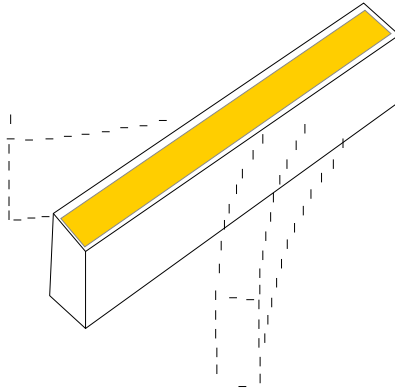


Bending Direction

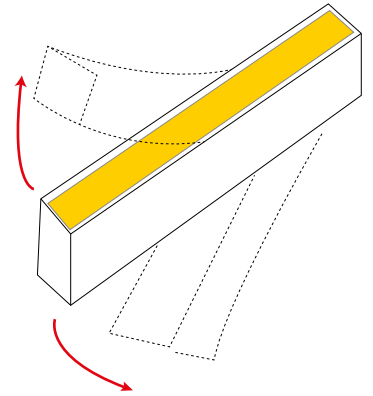

It Should Not Be Bent This Way

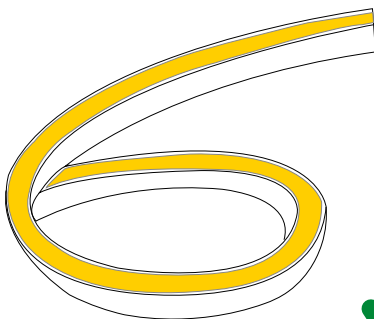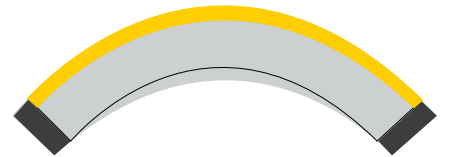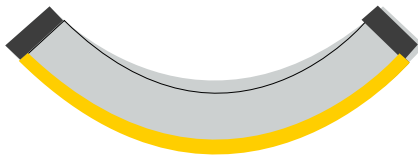

Light surface upwards ,
the strip is bendable to
right or left naturally, the
minimum bending
diameter is 30mm.

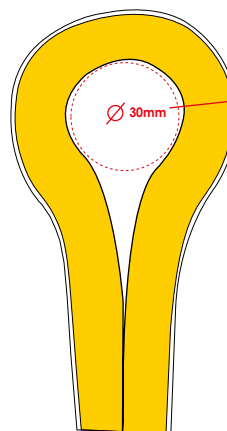

Turn the light surface towards
you and bend it maximum bending
diameter 30mm

Maximum bending
diameter is 30mm

Ø 30mm